

AutoCard IIIB

A flexible card terminal based on experience and innovation.

AutoCard IIIB is prepared for future EMV credit/debit cards with chip card.


Autotank's long experience of card payment systems for service stations has lead us to focus more then ever on customer convenience, easy operation and maintenance, along with product reliability.

AutoCard IIIB is designed for the service station customer as well as the station attendant and service technician.

A graphic colour display enlarges information possibilities. Even the standard backlit display with its large readable characters and the easily accessible receipt printer are good examples of this. The nice and soft illumination of the front and keyboard and the viewing protection when entering Pin-code are other examples.

The compact and front operated design of the terminal permits flexible mounting alternatives. For example pedestal mounted OPT, serving several dispensers, or single and double-sided dispenser configurations.

The terminal is also available as a combined card and banknote terminal - AutoPay IIIB

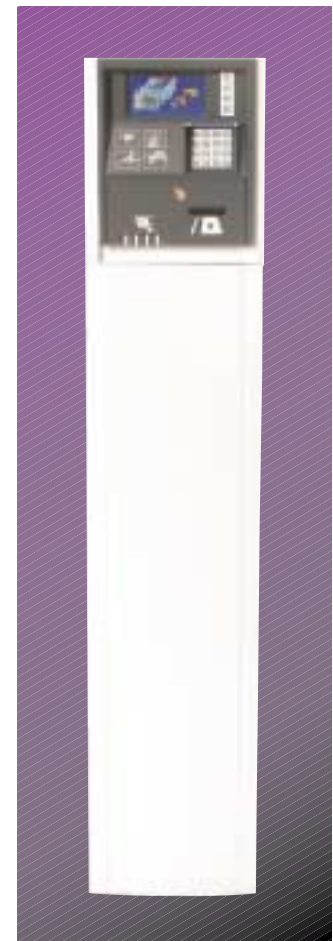

These pictures shows products with optional display and function keys.

AutoCard IIIB

Technical data

Card reader – Motorised reader/writer, 3 tracks magnetic stripes and IC cards. EMV-level 1 type approved.
 – Alternative. Manual Swipe reader with reading of 3 tracks.

Receipt printer – Thermal printer with cutter. International or National characters. 48 char/line, max speed 80 mm/s.
 Sensors for Paper end / near end.
 Paper width 80mm. Max. Ø110 mm paper roll.

Display – Backlit LCD. 4 lines with 20 characters.
 Character height 12,4 mm.

Keyboard – Security PIN-pad approved for bankcard requirements.
 Weather protected (IP65) and vandal resistant design in metal.

Communication – Autotank ATCL. Prepared for IFSF/LON.
 Interface to Car Wash.

Operating range – -40 - +55°C, 10 - 95 % RH.

Main voltage – 230 VAC 50 Hz.

Power consumption – Max 1,7 A.



Options and alternatives

Display – 6" graphic TFT colour LCD wide screen.
 High brightness, 400 cd/m², minimises reflexes.

Proximity reader – Radio Frequency identification, RFID, through key tags or proximity ISO-standard cards. With or without Pin-code.

Card reader – Manual insert 3 tracks magnetic stripe and IC card reader. EMV level 1 type approved.

Keyboard – Four function keys next to the display.

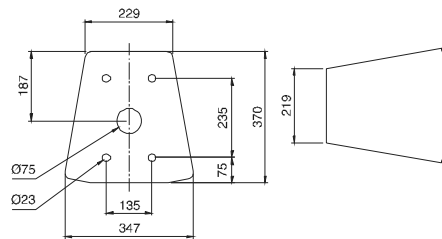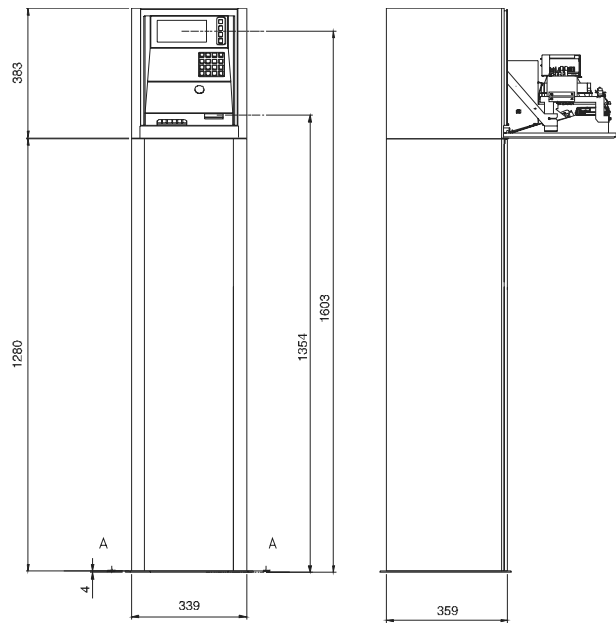

Optional graphic colour display for customer guidance gives fantasy a role in information.



Easy accessible receipt printer with cutter and room for a large roll of paper.



Weather and vandal resistant keyboard in metal.